

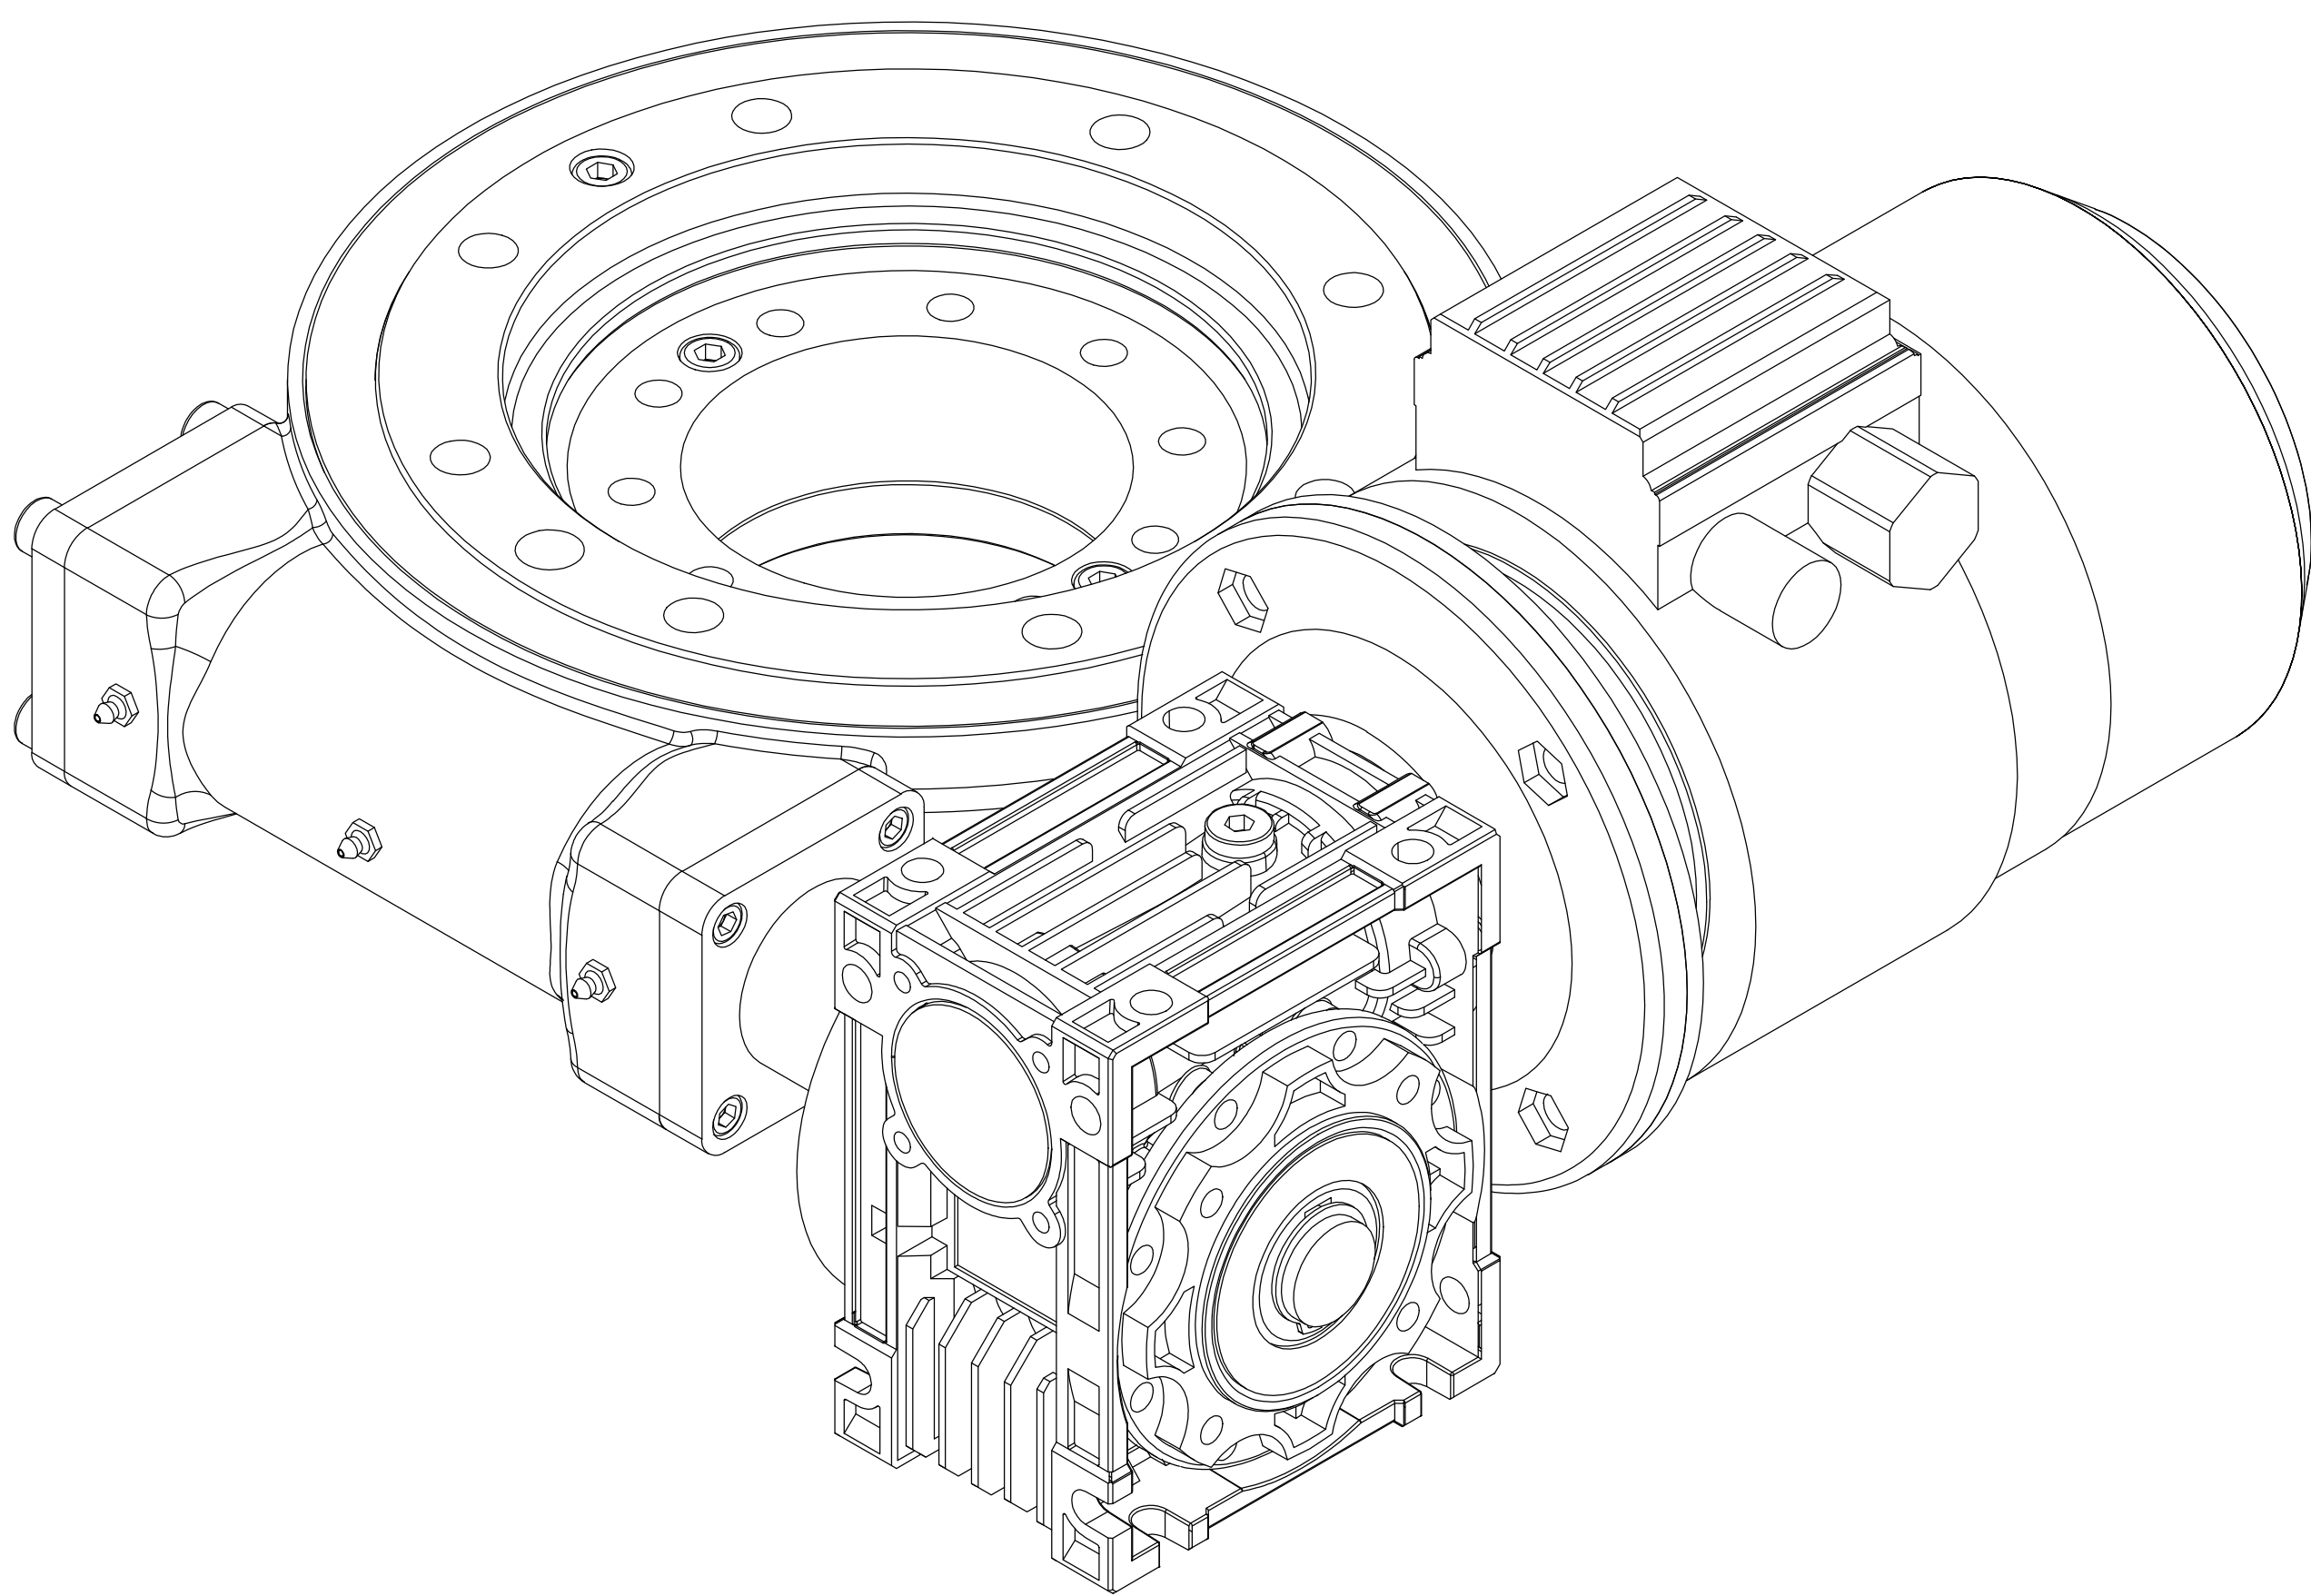
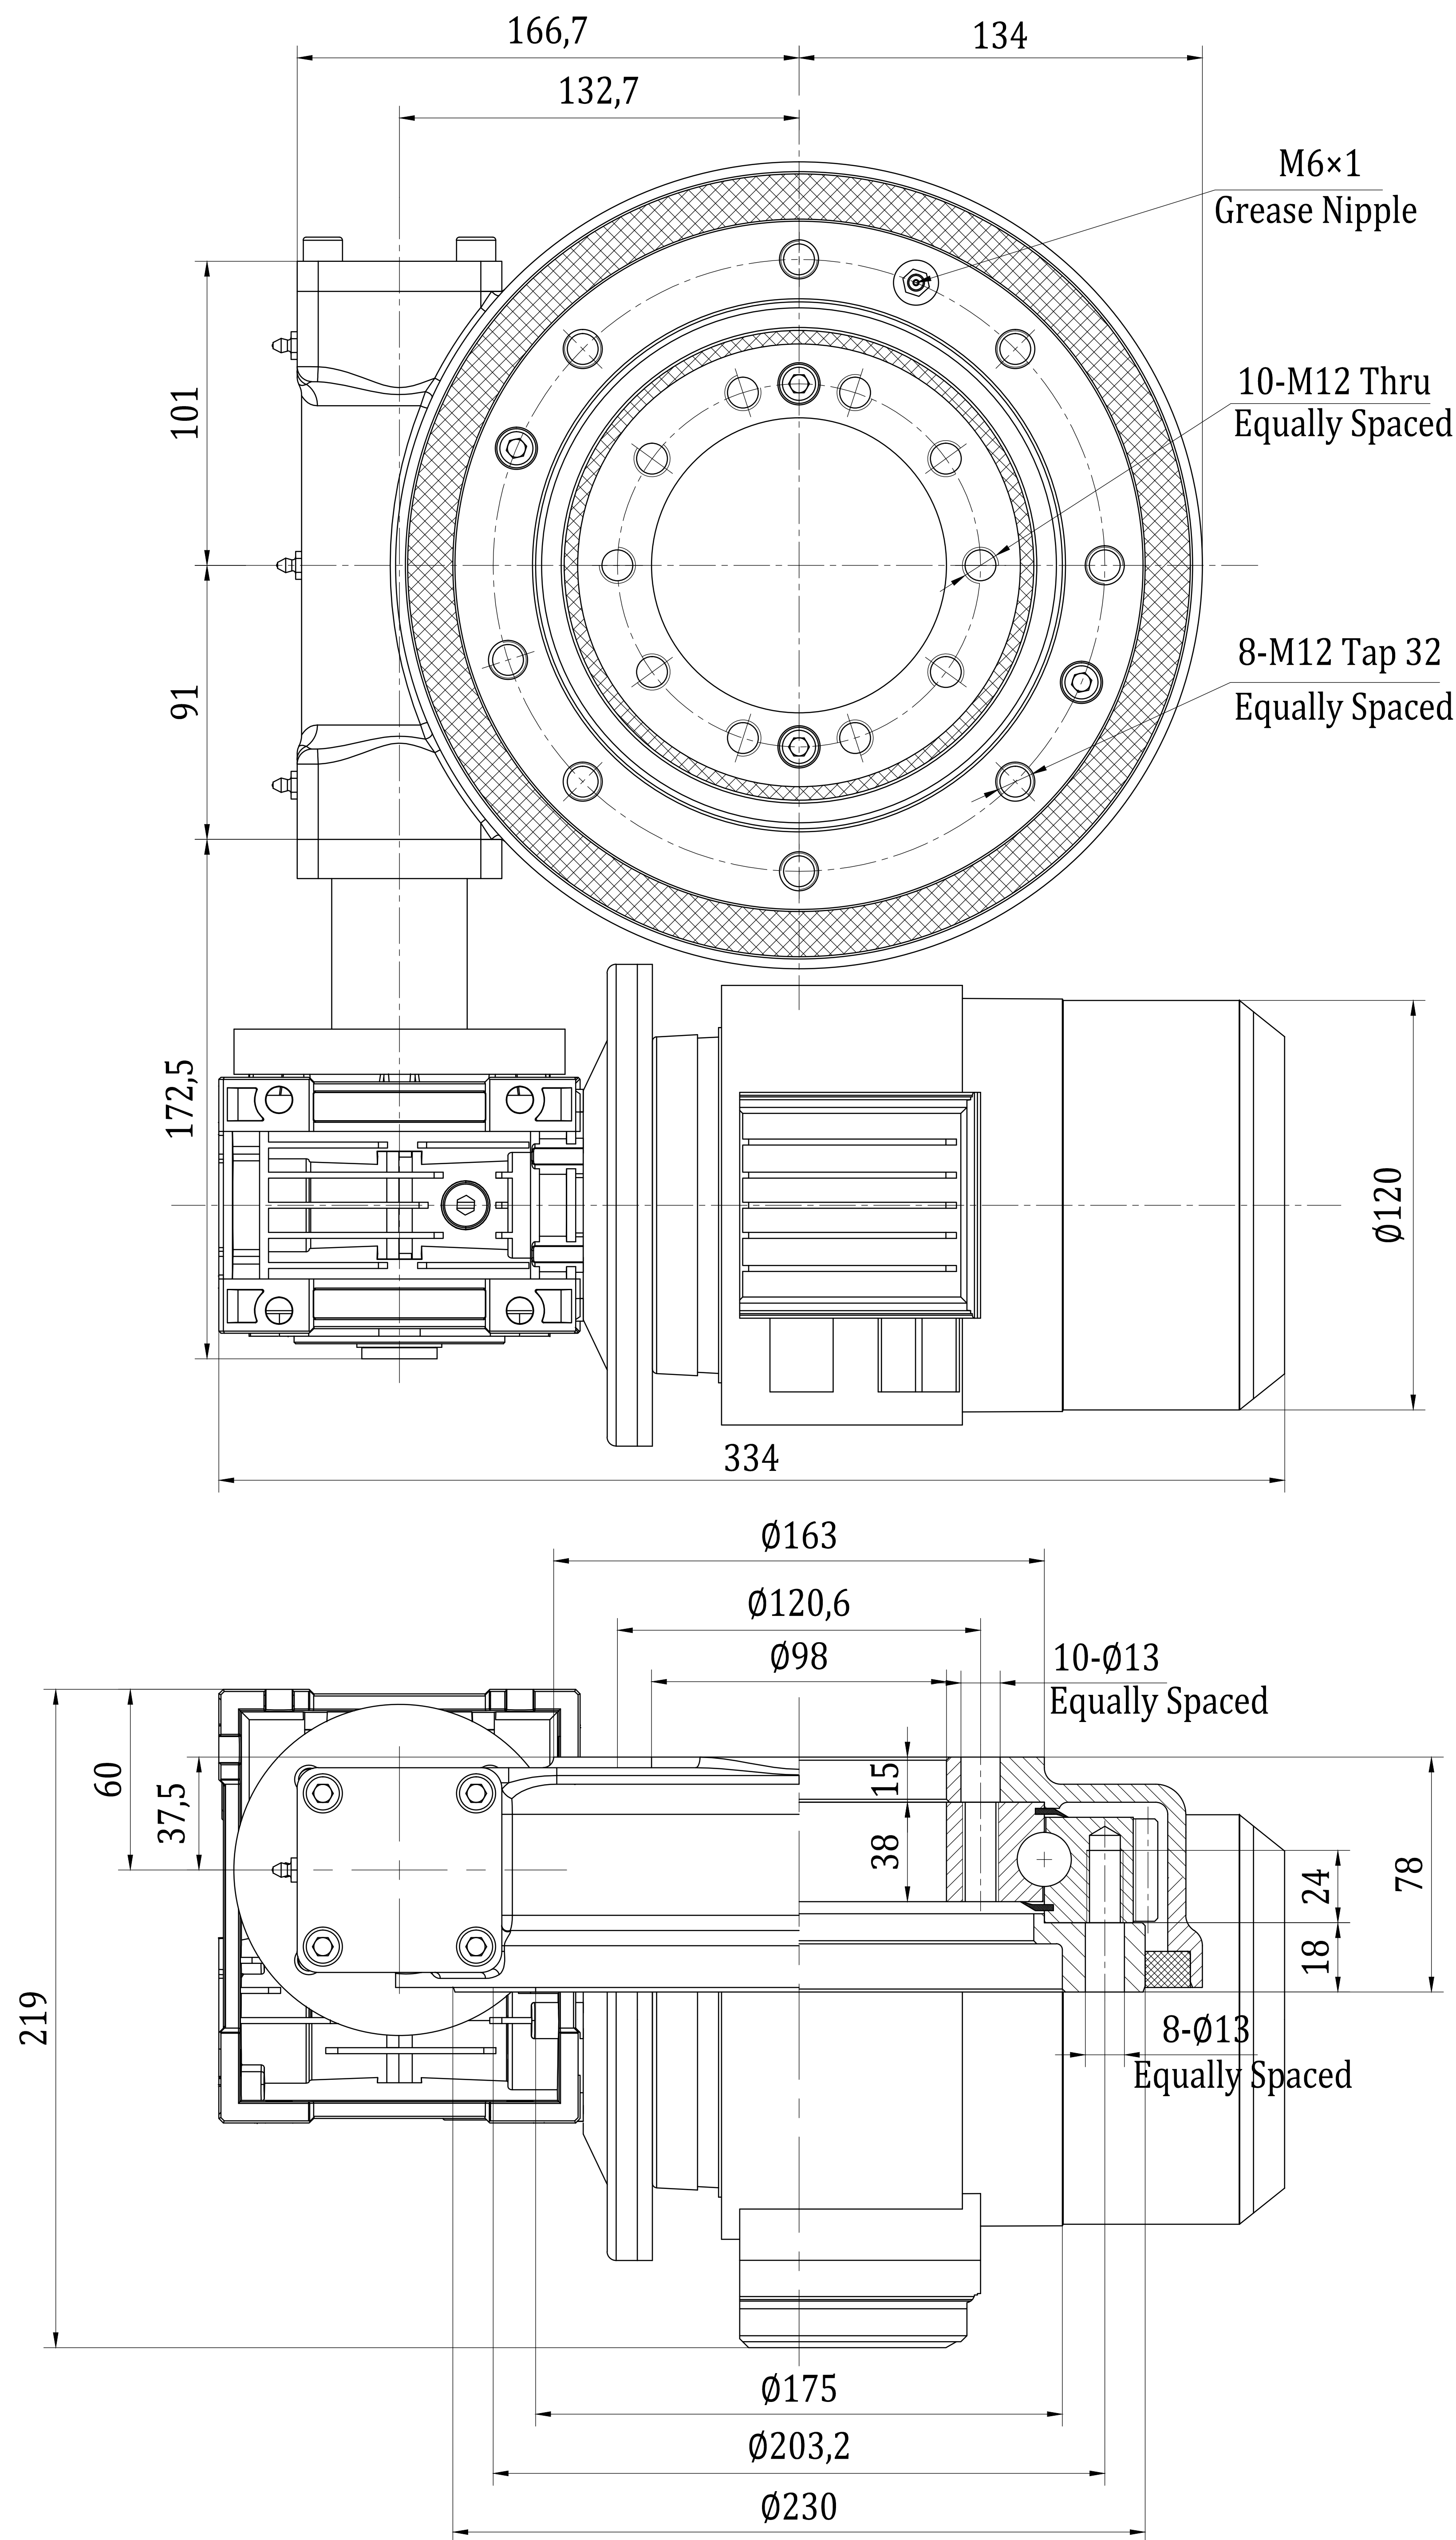
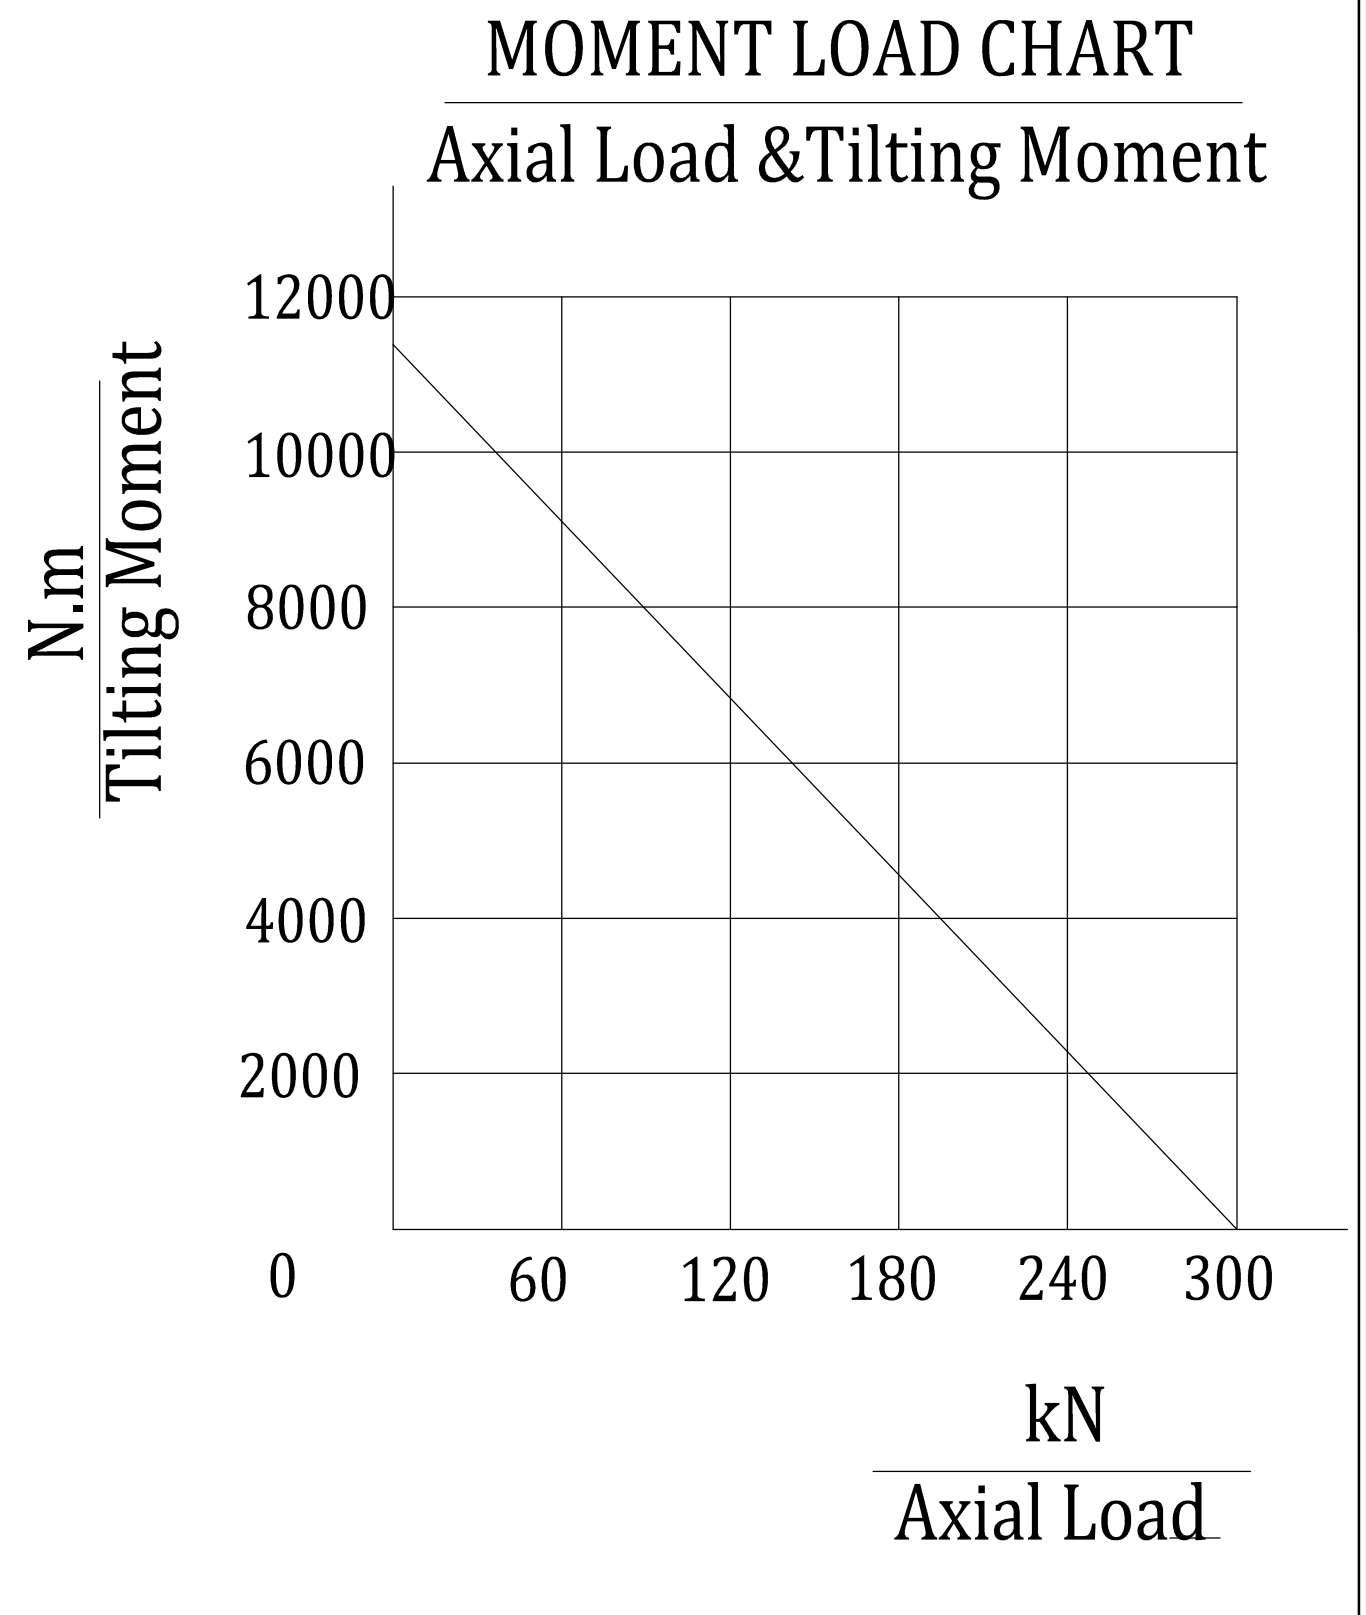


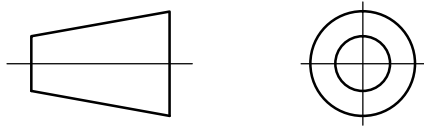

Slewing Drive Performance Parameters		
Rated Output Speed	0.39rpm	
Output Torque（max）	1013N.m	748 lbf.ft
Tilting Moment	13500 N.m	9958 lbf.ft
Holding Torque	10400N.m	7671 lbf.ft
Static Axial Rating	133 kN	29925 lbf
Static Radial Rating	53 kN	11925 lbf
Dynamic Axial Rating	32 kN	7200 lbf
Dynamic Radial Rating	28 kN	6300 lbf
Gear Ratio	71:1	
Precision	≤0.2°	
230V AC Motor Performance Data(230/280/35)		
Rated Output Torque	35.67 N.m	
Rated Output Speed	28 rpm	
Rated voltage	230V	
Rated power	0.18KW	
Rated frequency	50HZ	
IP Class	IP 55	
Temperature	-30℃≤0≤60℃	
Humidity	90%	



REV	DATE	REVISER	REVISER			
DESIGNED BY	2019/10/1	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2019/8/1	Rui Wang				
APPROVED BY	2019/8/1	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
			67 kg	1 : 3		
			SIZE	A3		
SYMBOLE ISO			SHEET	1 / 1	SC7-71-RC-230V-A071	REV A